



BORDEAUX

# Technical Data

Planning dimensions, installation options and configuration data

**This technical information is provided as a planning guide. All stated dimensions are subject to a general tolerance of approximately +/- 5%.**

DIMENSIONAL GUIDANCE

Measurements are approximate. Refer to the lettered sketches alongside the size tables when planning a Bordeaux installation.

INSTALLATION BASES

The stated heights assume an anchor tube (RZ118 or RZ121). The dimensional data lists the additional height for other installation bases.

reserved. Product photography, technical information, dimensional data and written content may not be copied, reproduced or distributed without prior written permission from Morton Parasols Ltd.

MOBILE AND STATIONARY OPTIONS

The following pages show the original Bordeaux dimensional data, lettered elevation and installation options, including full frame pedestals, wheels and an anchor tube.

**IF IN DOUBT - PLEASE ASK**

Our parasol specialists are available to assist with product selection, installation planning and dimensional checks.

MORTON COMMERCIAL & MARINE PARASOLS


Unit 1, Horseferry Bridge, Cirencester Road, Little Witcombe, Gloucester GL3 4SU, United Kingdom  
T: +44 (0)1452 865260 | [info@mortonparasols.com](mailto:info@mortonparasols.com) | [mortonparasols.com](http://mortonparasols.com)



BORDEAUX TECHNICAL DATA

Square

2.5 m x 2.5 m to 4.0 m x 4.0 m

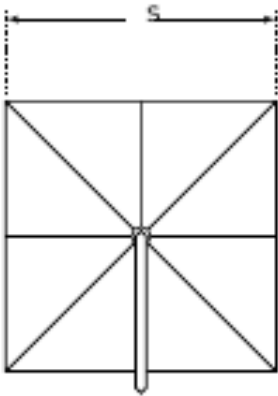

Square with 8 segments


| Size (m)               | 2.5 x 2.5                    | 3.0 x 3.0 | 3.25 x 3.25        | 3.5 x 3.5 | 4.0 x 4.0 |
|------------------------|------------------------------|-----------|--------------------|-----------|-----------|
| Area (m²)              | 6.25                         | 9         | 10.6               | 12.3      | 16        |
| S (cm)                 | 250                          | 300       | 325                | 350       | 400       |
| O (cm)                 | 150                          | 175       | 187                | 200       | 225       |
| P Arc length (cm)      | 135                          | 156       | 170                | 185       | 206       |
| Q (cm)                 | 20                           | 15        | 15                 | 20        | 20        |
| R (cm)                 | 125                          | 150       | 162                | 175       | 200       |
| Weight (kg)            | 25                           | 27        | 28.5               | 30        | 33        |
| Support pole           | outer Ø 76, pole thickness 3 |           |                    |           |           |
| Installation base (cm) | 50 / 50 / 60                 |           | 60 / 60 / 60       |           |           |
| Minimum ballast        | 1 x approx. 112 kg           |           | 2 x approx. 224 kg |           |           |



BORDEAUX TECHNICAL DATA

Rectangular

2.0 m x 3.0 m to 3.5 m x 4.5 m

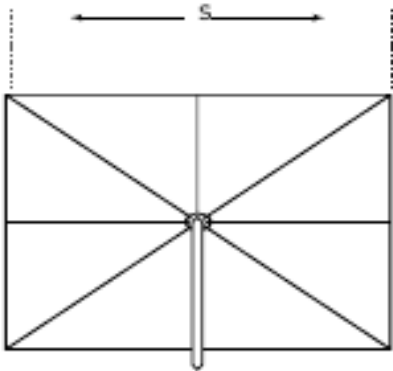

Rectangular with 8 segments


| Size (m)               | 2.0 x 3.0                    | 2.5 x 3.5 | 3.0 x 4.0 | 3.5 x 4.5 |
|------------------------|------------------------------|-----------|-----------|-----------|
| Area (m²)              | 6                            | 8.8       | 12        | 15.6      |
| S (cm)                 | 200 / 300                    | 250 / 350 | 300 / 400 | 350 / 450 |
| O (cm)                 | 125                          | 150       | 200       | 200       |
| P Arc length (cm)      | 106                          | 130       | 156       | 180       |
| Q (cm)                 | 20                           | 20        | 15        | 20        |
| R (cm)                 | 100                          | 125       | 150       | 175       |
| Weight (kg)            | 25                           | 27        | 30        | 33        |
| Support pole           | outer Ø 76, pole thickness 3 |           |           |           |
| Installation base (cm) | 50 / 50 / 60                 |           |           |           |
| Minimum ballast        | 1 x approx. 112 kg           |           |           |           |



BORDEAUX TECHNICAL DATA

Octagonal

Ø 3.0 m to Ø 4.5 m

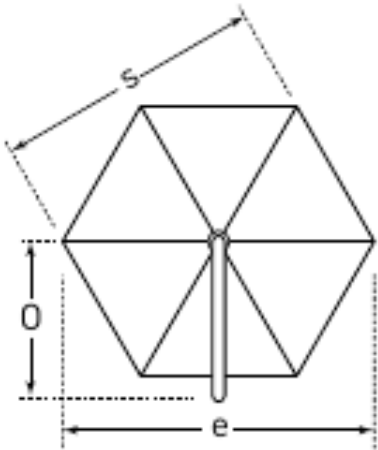

Single with 8 segments

| Size (m)               | Ø 3.0                        | Ø 3.5 | Ø 4.0 | Ø 4.5 |
|------------------------|------------------------------|-------|-------|-------|
| Area (m²)              | 6.4                          | 8.7   | 11.3  | 14.3  |
| s (cm)                 | 260                          | 300   | 345   | 387   |
| O (cm)                 | 175                          | 200   | 225   | 250   |
| P Arc length (cm)      | 155                          | 190   | 215   | 240   |
| Q (cm)                 | 15                           | 15    | 15    | 15    |
| R (cm)                 | 115                          | 134   | 153   | 172   |
| Weight (kg)            | 27                           | 29    | 31    | 33    |
| Support pole           | outer Ø 76, pole thickness 3 |       |       |       |
| Installation base (cm) | 50 / 50 / 60                 |       |       |       |
| Minimum ballast        | 1 x approx. 112 kg           |       |       |       |



BORDEAUX TECHNICAL DATA

# Dimensions and closing geometry


Lettered reference sketch and installation heights

Heights shown with anchor tube (RZ118, RZ121).  
Other bases increase height: RZ111 +9 cm; RZ112 +12 cm; RZ114 +16 cm; RZ116 +19 cm; RZ123 +5 cm.

| Size (m)               | Ø 3.0 | Ø 3.5 | Ø 4.0 | Ø 4.5 | 2.5 x 2.5 | 3.0 x 3.0 | 3.25 x 3.25 |
|------------------------|-------|-------|-------|-------|-----------|-----------|-------------|
| K (cm)                 | 144   | 131   | 112   | 100   | 120       | 97        | 80          |
| L (cm)                 | 234   | 234   | 234   | 234   | 224       | 224       | 224         |
| M (cm)                 | 260   | 260   | 260   | 260   | 250       | 250       | 250         |
| N without valance (cm) | 325   | 330   | 337   | 345   | 315       | 320       | 325         |

| Size (m)               | 3.5 x 3.5 | 4.0 x 4.0 | 2.0 x 3.0 | 3.5 x 3.5 | 3.0 x 4.0 | 3.5 x 4.5 |
|------------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| K (cm)                 | 61        | 40        | 110       | 80        | 57        | 25        |
| L (cm)                 | 224       | 224       | 224       | 224       | 224       | 224       |
| M (cm)                 | 250       | 250       | 250       | 250       | 250       | 250       |
| N without valance (cm) | 330       | 335       | 310       | 315       | 320       | 330       |

reserved. Product photography, technical information, dimensional data and written content may not be copied, reproduced or distributed without prior written permission from Morton Parasols.

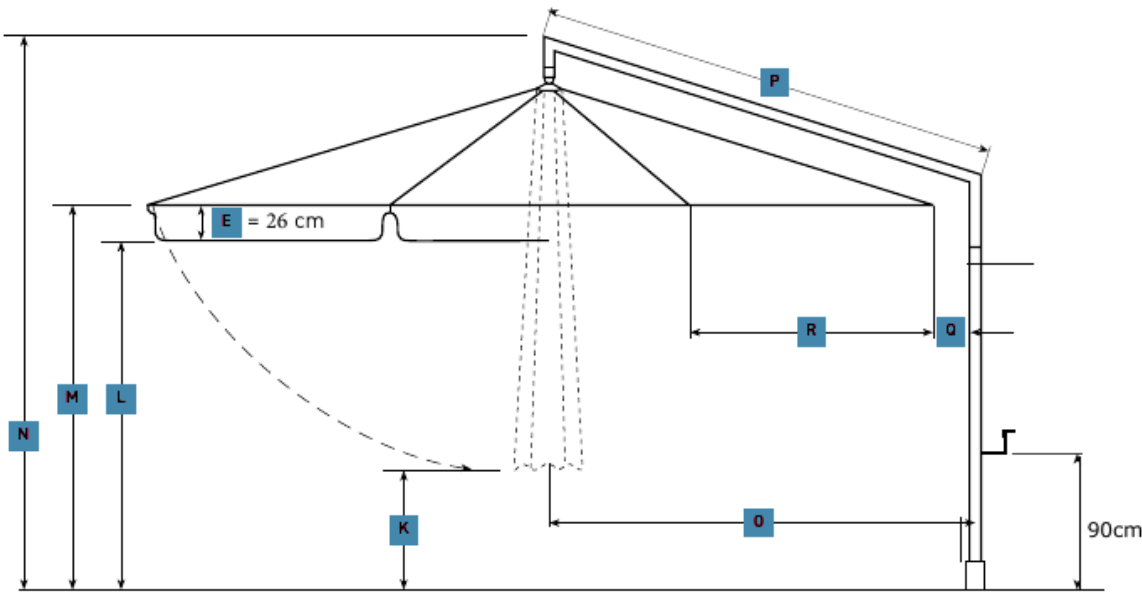



## BORDEAUX TECHNICAL DATA

## Mobile installation options

Pedestals, wheels and accessories

### BORDEAUX- mobile installation options

**Full frame pedestal without slabs**

frame size 103 x 103 cm, total height 29 cm, height of frame x = 5 cm, weight approx. 27 kg, galvanized. For 2 sets of standard concrete slabs 50 x 50 x 5 cm.

art. no. **RZ111****Full frame pedestal without slabs**

with 8 rubber diagonal support levelling screws, frame size 103 x 103 cm, total height min. 32 cm, max. 36 cm, weight approx. 28 kg, galvanized. For 2 sets of standard concrete slabs 50 x 50 x 5 cm.

art. no. **RZ112****Full frame pedestal on wheels**

with rubber heavy-duty rollers and fixing brakes, frame size 103 x 103 cm, total height 36 cm, diameter of rollers 5 cm, weight approx. 28 kg, galvanized. For 2 sets of standard concrete slabs 50 x 50 x 5 cm.

Attention: wind sensitive!

art. no. **RZ114****Heavy-duty wheels Ø 15 cm**

wheel diameter 15 cm, for uneven surfaces. Rubber, with fixing brakes, loading capacity 110 kg/wheel. Suitable for RZ414.

For orders with full frame pedestal

art. no. **351498**

For retrofitting

art. no. **351499**

## BORDEAUX Accessories and Bases

**Protective sleeve, version zipper and aluminium rod**

with zipper, grey tarp material. Please specify parasol size and valance option. Included in delivery of parasol.

**Covering made of PVC**

approx. 480 g/m<sup>2</sup>, only suitable for Ø 3 m, 2.85 x 2.85 m and 3 x 3 m.





## BORDEAUX TECHNICAL DATA

# Stationary installation options

Anchor tube and pedestal on feet

**Full frame pedestal on feet**

for forklift or lift truck transport, frame size 103 x 103 cm,  
foot height y = 10 cm, galvanized, weight approx. 30 kg.  
For 2 sets of standard concrete slabs 50 x 50 x 5 cm.

art. no. **RZ116**

reserved. Product photography, technical information, dimensional data and written content may not be copied, reproduced or distributed

## BORDEAUX – stationary installation options

**Anchor tube to be embedded in concrete**

2 pieces, screw-off upper part, for single and double-shade RIALTO,  
galvanized, weight approx. 9 kg, incl. top plate for winter protection.  
a = 22 cm, b = 29 cm, x = Ø 17 cm, y = 16 cm

art. no. **RZ118**